

Efka® FA 4611



Solvent-free dispersing agent for inorganic pigments in 100% systems, solvent-based coatings and printing inks


Efka® FA 4611 is a solvent-free dispersing agent (acidic polyether) which shows excellent stabilization of inorganic pigments, in particular titanium dioxide. With Efka® FA 4611 high pigment and filler loadings, strong reduction of mill-base viscosity and an improved rheological behavior can be achieved.

Efka® FA 4611 is broadly applicable because of its solvent-free character and it is compatible in a wide range of resin systems. Furthermore it is suitable for high gloss systems. Efka® FA 4611 is suitable for solvent-based and solvent-free Industrial and OEM/Refinish Coatings, Wood Coatings, Printing & Packaging and Composites.

Performance Highlights


- Solvent-free product - suitable for high solid and 100% solvent free solids
- High pigment and filler loadings
- Strong reduction of mill-base viscosity
- Improved rheological behavior
- Broad compatibility in a wide range of resin systems (e.g. UV-acrylic, PUR, UPE, epoxy)
- Suitable for high gloss systems
- Increased hiding power

UV Curable Wood Coating
Viscosity comparison after 1 week @ 50°C
Kronos® 2310: 15% + 10% extenders, pigment load: 25%

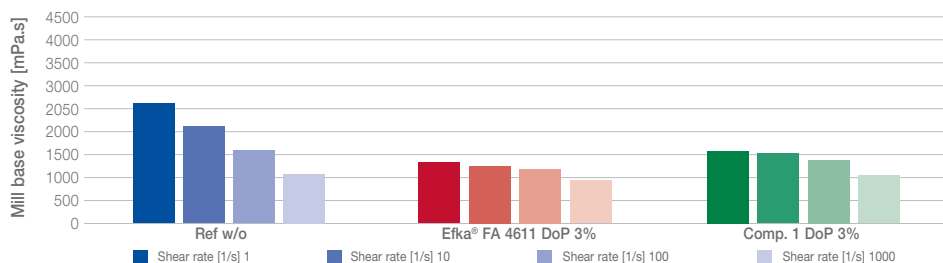

Efka® FA 4611 shows comparable rheology behavior with distinctly low pseudoplasticity.

Rheology of TiO₂ pigment concentrate
DoP: 1,5%
Kronos® 2310, pigment load: 65%

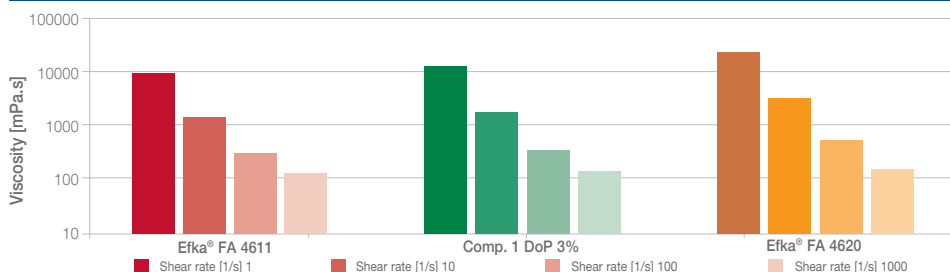

Lowest mill base viscosity for Efka® FA 4611; Efka® FA 4620 and Comp. 1 show comparable rheology.

Efka® FA 4611: Characteristic Values

Property	Value
Appearance	clear, colorless to yellow liquid
Acid value	~ 129 mg KOH/g
Density at 20°C (68 °F)	~ 1.16 g/cm ³
Solid content (1h 120°C)	90 - 100 %
Refractive Index	1.4635 – 1.4735



Contacts worldwide

Asia

BASF East Asia Regional Headquarters Ltd.
45/F., Jardine House
No. 1 Connaught Place
Central
Hong Kong
formulation-additives-asia@basf.com

Europe

BASF SE
Formulation Additives
67056 Ludwigshafen
Germany
formulation-additives-europe@basf.com

North America

BASF Corporation
11501 Steele Creek Road
Charlotte, NC 28273
USA
formulation-additives-nafta@basf.com

South America

Rochaverá - Crystal Tower
Av. das Nações Unidas, 14.171
Morumbi - São Paulo-SP
Brazil
formulation-additives-south-america@basf.com

www.basf.com/formulation-additives

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. When handling these products, advice and information given in the safety data sheet must be complied with. Further, protective and workplace hygiene measures adequate for handling chemicals must be observed.

® = registered trademark of the BASF Group