



TINUVIN® 5070


New generation UVA/HALS blend for candle applications

Performance highlights

- High thermal stability
- Broad compatibility in natural/paraffin wax blends
- Good weathering performance in candle applications
- Protects candle from color fading and in-store color shift due to store display lighting

Key features

- No negative interaction with candle dyes or fragrances
- Low viscosity
- Enhanced thermal stability
- Reduced color

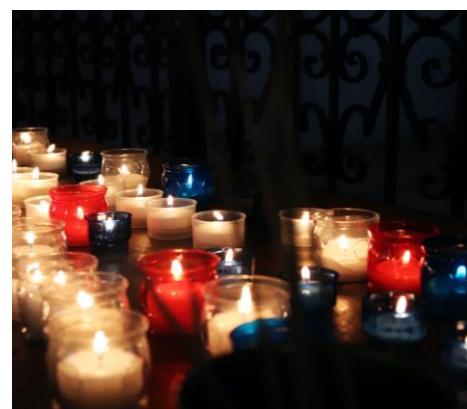

TINUVIN 5070


New generation UVA/HALS blend for candle applications

Application highlights


TINUVIN 5070 is a UVA/HALS blend designed to meet the high performance and durability requirements of candle wax compositions and sealant applications where other products fail due to basicity and/or compatibility. TINUVIN 5070 provides a low viscosity product which improves ease-of-use, enhanced thermal stability and reduced color. Concerning candle applications, TINUVIN 5070 can be used either in the fragrance oil or in candle wax with no negative interaction with candle dyes or fragrances during storage.

Superior color stabilization

0.4% and 0.6% TINUVIN 5070 Loading after 216 and 336 Hours Weathering

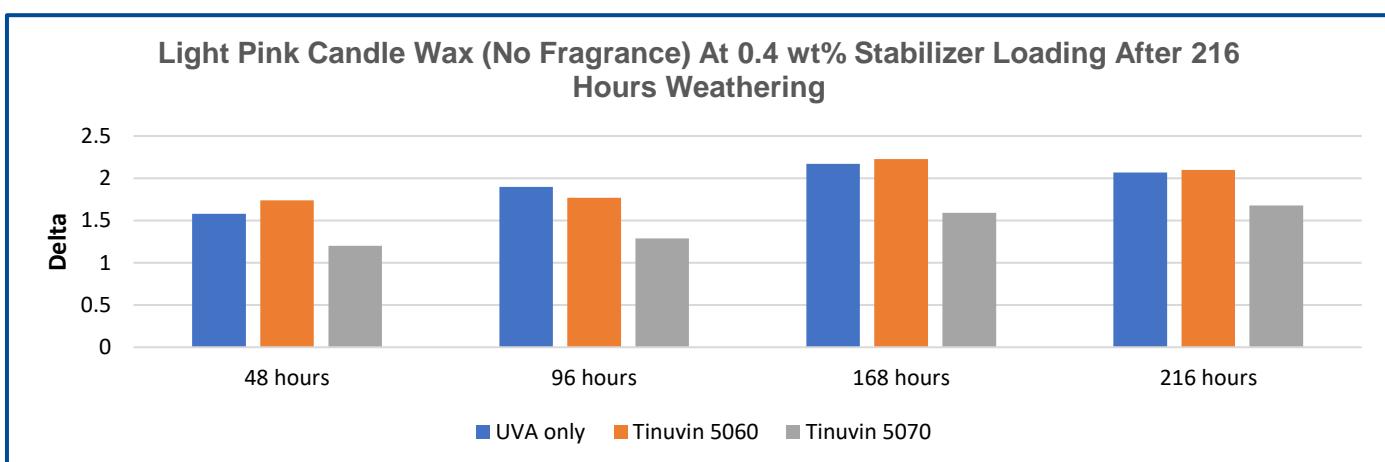

TINUVIN 5070 has the best color stabilization and less color generation in dyed wax over time (216 hours).

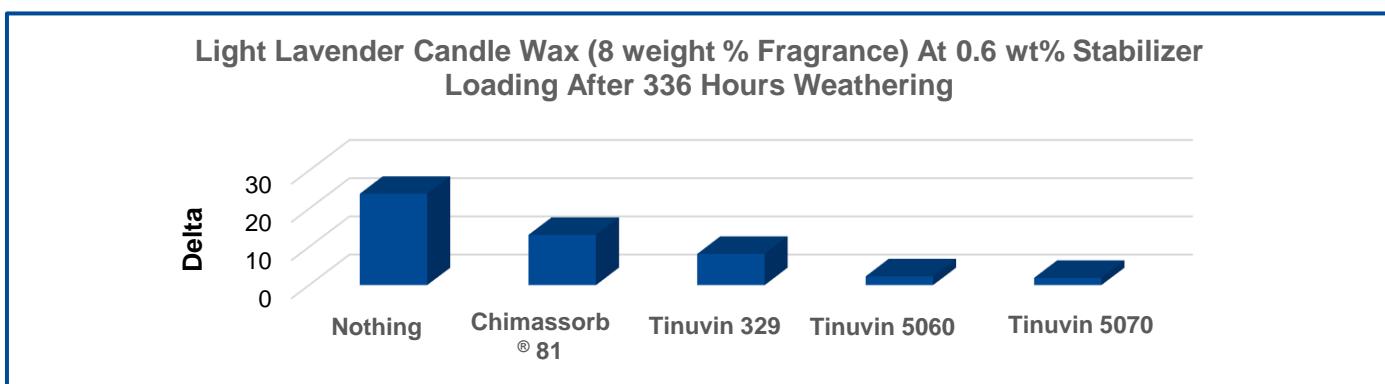

Contacts

Please contact our technical service department for more help on formulating with products from the Tinuvin product line.

Asia

BASF East Asia Regional HQ Ltd.
45/F., Jardine House
No.1 Connaught Place
Central
Hong Kong
formulation-additives-asia
@basf.com

Europe, Africa, West Asia

BASF SE
Formulation Additives
67056 Ludwigshafen
Germany
formulation-additives-europe
@basf.com

North America

BASF Corporation
11501 Steele Creek Road
Charlotte, NC 28273
USA
fomulation-additives-nafta
@basf.com
www.bASF.us/dpsolutions

South America

BASF S.A.
RochaVerá- Crystal Tower
Av. das Nações Unidas, 14.171
Morumbi - São Paulo-SP
Brazil
formulation-additives-south-america
@basf.com

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. When handling these products, advice and information given in the safety data sheet must be complied with. Further, protective and workplace hygiene measures adequate for handling chemicals must be observed. (1/2018)

® = Registered trademark of the BASF Group